

FORMED DECORATIVE FIBERGLASS POLE

SPECIFICATIONS:

**PT03 pole:** formed fiberglass-reinforced plastics, high-tensile carbon steel round straight pole inside.

A 90 by 180mm maintenance opening, complete with cover and ground connector, is centered 13"(330mm) from the bottom of the anchor plate.

**Pole top tenon:** high-tensile carbon steel tube, round welded to shaft, standard sizes are 76mm O.D. x 90mm long, special size is available.


**Finish:** "Hot Dip" chemical etching preparation. Polyester powder coat textured finish. Standard colors are black (BK), dark bronze (DB), grey (GY) and white (WH), custom colors are available. Durable UV-resistant exterior finish as per # ASTM G7 and outstanding salt-spray resistance according to # ASTM D2247 testing procedures.

Note: EPA recommendations are calculated according to AASHTO 1994 standards and include a 30% gust factor, with a 50-lb. (22.7 kg) load applied 1ft. (305 mm) above the top of the pole.

风载计算中

1MPH=1.61公里/小时,

1SQ. FT=0.0929平方米

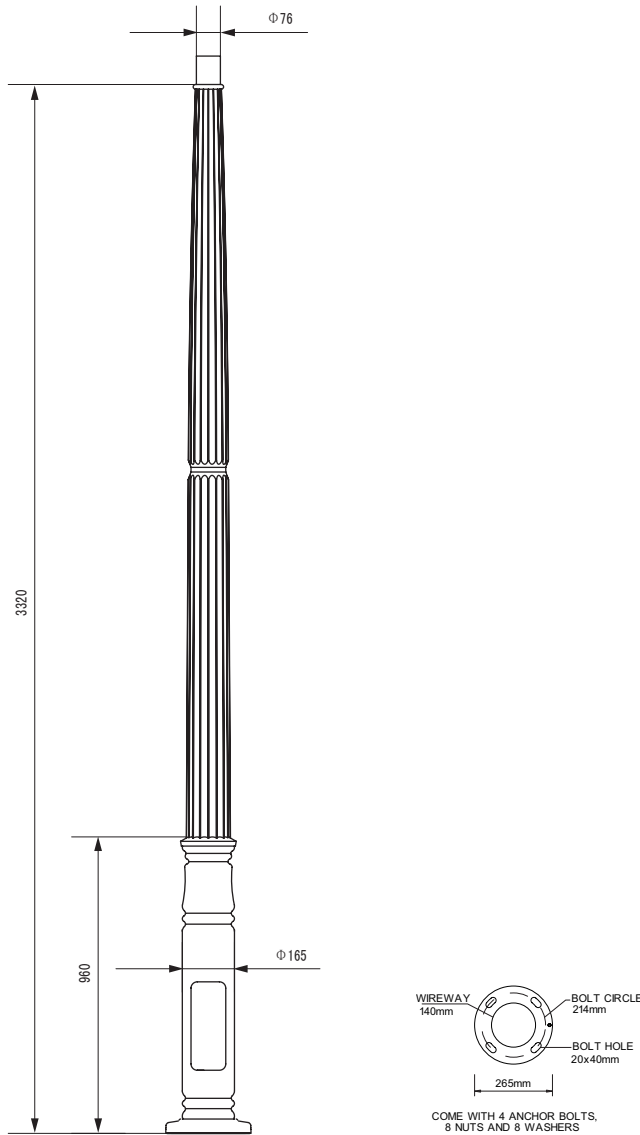

ORDERING INFORMATION (订购信息)

CATALOG NUMBER (产品编号)	NOMINAL HEIGHT (高度)	WALL TOP (杆上径)	WALL THICKNESS (壁厚)	WEIGHT* (重量)	EPA RATING (可承受最大风载面积)			ANCHOR BOLTS (基础螺栓)	QUANTITIES (装箱数量)	
					70MPH	80MPH	100MPH		20"	40"
	M	mm	mm	KG	SQ.FT	SQ.FT	SQ.FT	Φmm	Sets	Sets
PT03-3.3	3.32	90	3.0	31	30	25	15	16-530	120	360

\*WEIGHT WITHOUT Bolt, bolt weight 5kg

Ordering number & sample  
(订购号及示例)

Pole Catalog Number - Color Code

PT03-3.3-BK  
PT03-3.3-DB

FORMED DECORATIVE FIBERGLASS POLE



**技术说明:**

**PT03灯杆**

- 船用SMC模压外壳，抗冲击，50年以上使用寿命，内衬优质碳素钢杆，高度3.32米，钢杆与花式钢灯座及底部钢法兰盘双面牢固焊接，整体高质量热浸镀锌处理，通过3000小时以上抗盐雾试验。
- 90x180mm维护门，配置防盗门盖和接地线装置，中心离法兰底面330mm。

**灯杆顶部接口**

- 顶部用优质碳钢焊接在灯杆上，标准接口:  $\Phi 76\text{mm}$ ，长90mm。

**表面处理**

- 热浸镀锌处理后，表面聚酯粉体涂装，
- 标准颜色为黑色，深青铜色，可以选择其它颜色，参见本公司颜色表或标准颜色表
- 使用符合ASTM G7标准的高耐候性的室外用粉体，ASTM D2247实验中有突出的抗盐雾性能。

