


COSTUME SPECIALLY SIZE

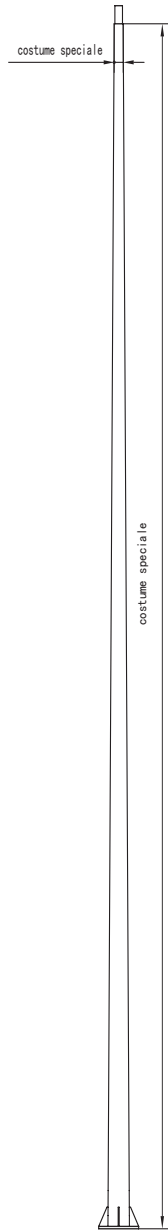

SPECIFICATIONS:

Pt12 pole: high-tensile carbon steel, round tapered shaft, welded together with base flange. the entire shaft assembly is hot dipped galvanized.

Finish: "Hot Dip" chemical etching preparation. Polyester powder coat textured finish. Standard colors is black (BK) and dark bronze (DB), other colors is available, please see our color tables or standard RAL color. Durable UV-resistant exterior finish as per # ASTM G7 and outstanding salt-spray resistance according to # ASTM D2247 testing procedures.

Note: EPA recommendations are calculated according to AASHTO 1994 standards and include a 30% gust factor, with a 50-lb. (22.7 kg) load applied 1ft. (305 mm) above the top of the pole.

风载计算中

1MPH=1.61公里/小时,

1SQ. FT=0.0929平方米

技术说明:

PT12灯杆

- 优质碳素圆锥钢杆，高度6-12米，与底部法兰牢固焊接，整体高质量热浸镀锌处理，通过3000小时以上抗盐雾试验。

表面处理

- 热浸镀锌处理后，表面聚酯粉体涂装，
- 标准颜色为黑色，深青铜色，可以选择其它颜色，参见本公司颜色表或标准颜色表
- 使用符合ASTM G7标准的高耐候性的室外用粉体，ASTM D2247实验中有突出的抗盐雾性能。