

VITA SERIES



HA157C




Feature


- Traditional style area lighting
- Very High quality for upmarket
- Heavy-duty, die-cast FRP housing
- High efficiency toughened glass len
- Tool-less removable power tray assembly for ease of maintenance
- Available with medium- or mogul-base socket
- Base casting slip fits over a standard 3" O.D. tenon



Dimensions

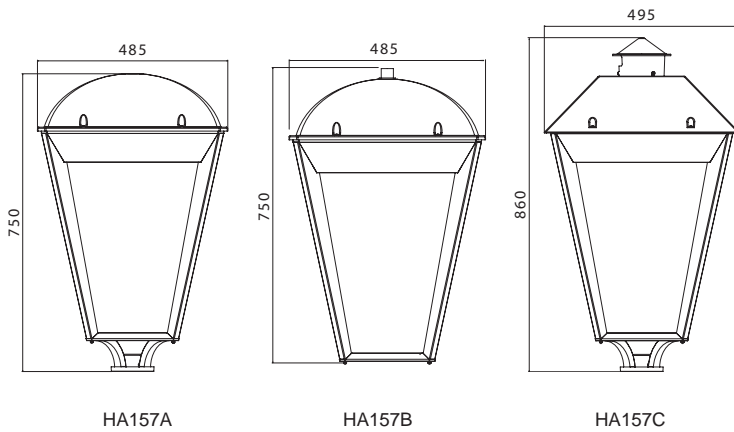

Mechanical

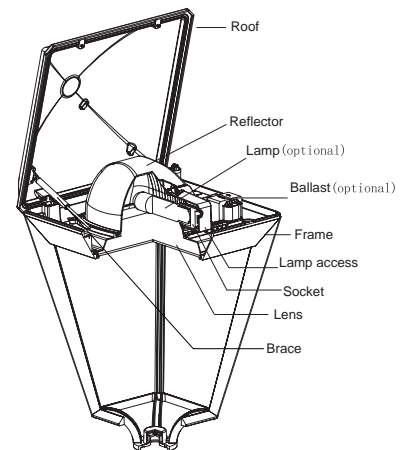

Specification

Application: Urban roads and street , Squares areas, Pedestrian areas, Residential areas,Parks,Garden

Installing Hight: 3-5m

Mounting : Post-top: suitable for Ø76mmx90mm tenon

Lamps: HID (HPS MH)/ LED bulb / CFL lamps, 30W-150W
70W/150W HPS high pressure sodium, cap: E27/E26/E40/E39

70W/150W MH metal halide, cap: E27/E26/E40/E39

35w/45W/65W Compact fluorescent, cap: E27/E26

30W/40w/50W Led bulb, cap: E27/E26/E40/E39

Material: FRP, fiber glass body

Roof,Frame,Base & Reflector: Fiberglass-reinforced plastics,excellent mechanical strength and bear the causticity ,vacuum metalizing for the Reflector

Lens : Toughened flat glass


Color: Standard colors is black (BK) ,other colors dark bronze (DB)(RAL7013), dark grey (GY)(RAL7016), light grey(LG)(RAL7042), dark green (DN)(RAL6005) are available

Standards:

Isolation degree Class I, IP Rating(optical) IP65


Photometrics

Photometric curve

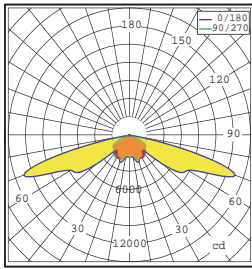

Lamp:150W HPS 15000Lm


Isolux curve



Mouthing Height:4m


TYPE III

Photometric curve

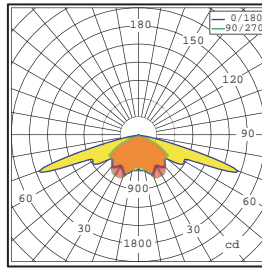

Lamp:70W HPS 6000Lm

Isolux curve



Mouthing Height:4m

TYPE III

Ordering Guide

Luminaire No. - Pole No.

Order No.	HEIGHT mm	Luminaire Ctn. cm	Total Vol m ³	G.W./N.W. kg/ctn	QUANTITIES 20'/40'
HA157A	760	51x51x78/1pcs	0.20	12/10	143/299
HA157A-PS05-4.0	4700	51x51x78/1pcs	0.36	49/47	77/158
HA157A-RMB1-PS05-3.5	4500	51x51x78/1pcs	0.39	48/53	71/146
HA157A-RMB2-PS05-3.5	4500	51x51x78/1pcs	0.62	59/69	45/92
HA157B	710	51x51x78/1pcs	0.19	12/10	143/299
HA157B-RMA1-PS05-3.5	3800	51x51x78/1pcs	0.38	48/53	73/150
HA157B-RMA2-PS05-3.5	3800	51x51x78/1pcs	0.60	59/69	46/95
HA157C	850	52x52x89/1pcs	0.24	13/11	112/224
HA157C-PS05-4.0	4700	52x52x89/1pcs	0.40	50/48	75/154
HA157C-PS05-2R-4.0	4700	52x52x89/1pcs	0.43	49/54	70/142

